


## «LONDON»

### RHYTHMIC GYMNASTICS EXERCISE FLOOR

REF. 6667

This 14 x 14 metre FIG-approved competition exercise floor was used at the London (2012), Rio (2016) and Paris (2024) Olympic Games, as well as at several World Championships, including Kiev (2013) and Valencia (2023).

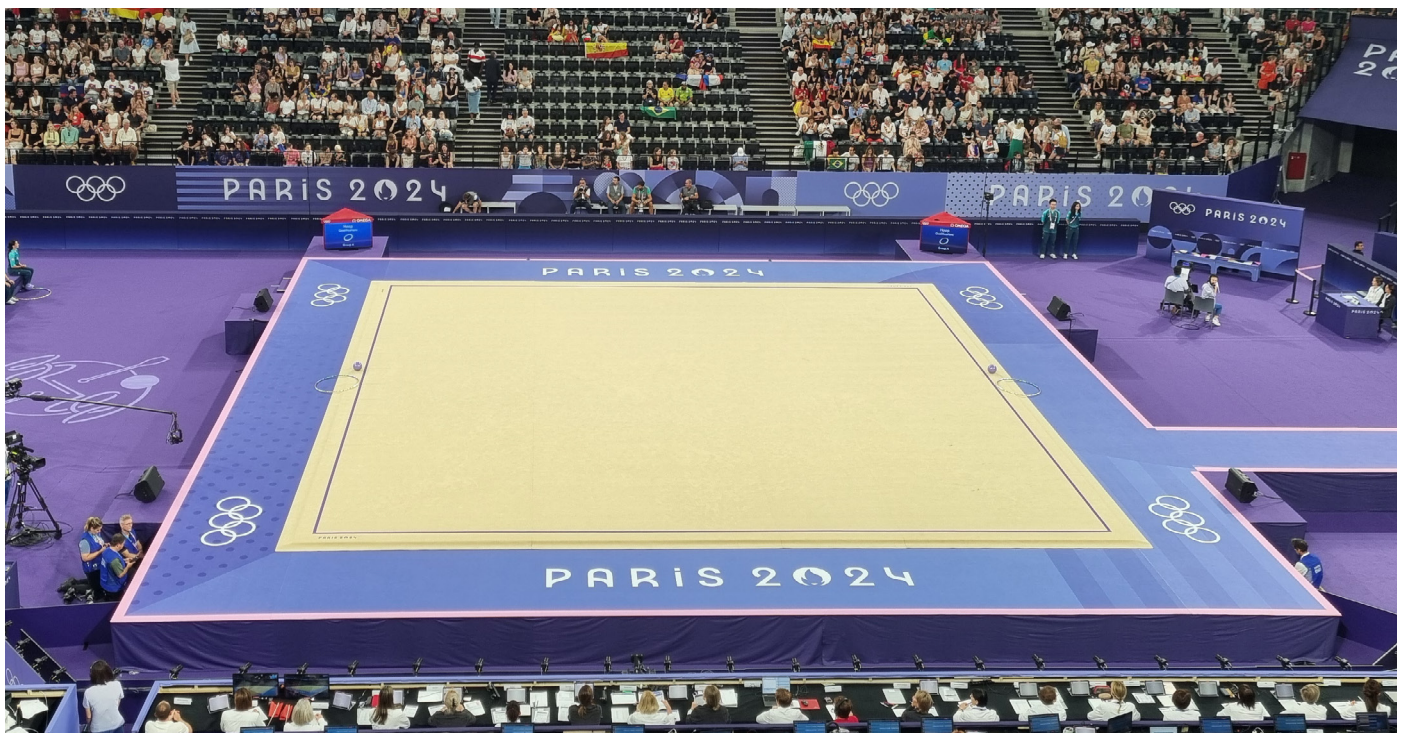

Used in major Rhythmic Gymnastics competitions, this exercise floor offers gymnasts effective resilience with its consistent gymnastics area. Its excellent vibratory impact absorption reduces strain injuries on wrists and ankles during sequences.

It is quick and easy to set up, and the 13 x 13 m peripheral markings provide a reassuring visual outline of the gymnastics area.

This exercise floor provides a safe, flat working surface ensuring the stability and accuracy of the exercises performed.

## ADVANTAGES

### PERFORMANCE

The exercise floor is designed with a consistent gymnastics area over its entire surface, providing highly efficient resilience to support successful execution of the most ambitious sequences.

### COMFORTABLE IN USE

The materials used in the production of this exercise floor, in particular for the carpet, provide optimum absorption of impacts in jumps and acrobatic movements. This helps protect gymnasts' health by reducing risks of strain injuries on the wrists and ankles.

### EASY SET-UP

The exercise floor can be set up quickly and easily. The 13 x 13 metre peripheral markings also provide a clearer view of the gymnastics area for greater reassurance when practising.





# TECHNICAL SPECIFICATIONS

## LONDON Exercise floor

- F.I.G. approved
- Overall dimensions: 14 x 14 m
- Thickness: 46 mm
- Peripheral markings: 13 x 13 m




## GR CARPET - REF. 6655



- Dimensions = 14 x 14 m.
- Comprising three strips measuring 14 x 4 m and one strip measuring 14 x 2 m.
- The 13 x 13 m area is marked out with red adhesive hook-and-loop strips. The outer edges of the strips mark the measurement limits of the 13 m area.

- Edges are finished with whip stitching.
- Carpet material: polyamide PA6, antistatic, tufted, soft.
- Total carpet height: 7 mm.
- Height of the carpet fibres: 4.5 mm.
- Number of fibres: 244,000 units/m<sup>2</sup> and high density of 1,480 g/m<sup>2</sup>.
- The carpet is fire-rated according to the European standard CFL S as per EN 13501-1 and classified M3 according to French standards.
- Storage options: see below in the associated products.

## RG FLOOR BASE - REF. 6665

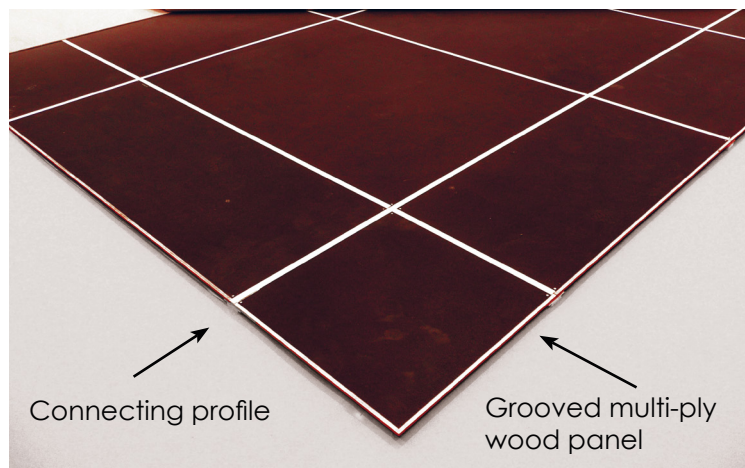

- Dimensions = 13.50 x 13.50 m
- Thickness = 4 cm.
- 12 mm thick plywood,
- 9 alternating birch plies, and 28 mm thick dynamic foam pads on the underside of the flooring.
- The panels are joined using interlocking profiles, ensuring a uniform surface.

This wooden floor is made up of grooved panels for the insertion of joining profiles and is treated for moisture resistance with a water-resistant phenolic film covering both sides. The underside of the flooring is smooth for adhesion of the foam pads, while the upper surface is embossed for carpet stabilisation and grip.

This flooring consists of:

- 48 full floor panels (200 x 150 x 4 cm)
- 4 corner edges (75 x 75 x 4 cm)
- 16 floor edges (150 x 75 x 4 cm)
- 12 floor edges (200 x 75 x 4 cm)
- 54 plastic joining profiles (197.4 cm)
- 63 plastic joining profiles (149.7 cm)
- 18 plastic joining profiles (72.6 cm)
- 63 plastic joining plates
- 36 plastic half joining plates
- It is equipped with 28 mm thick Évazote foam pads, made of polyethylene, with 41 pads per full pane




**DOWNLOAD THE ASSEMBLY INSTRUCTIONS**

## ASSOCIATED PRODUCTS

### CARPET REEL TROLLEYS

REF. 6670 & 6672 & 6673

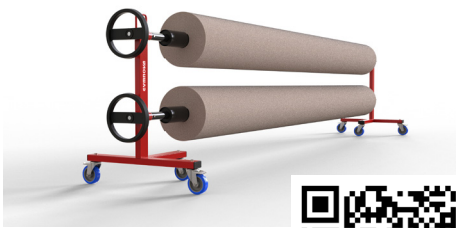

Ref. 6673



Dimensions: 4 m (Ref. 6670 & 6673) and 2 m (Ref. 6672).

- With omnidirectional transport wheels.
- Equipment required to roll a complete RG carpet:  
= 3 Ref. 6670 + 1 Ref. 6672 or 2 Ref. 6673.

[DOWNLOAD THE ASSEMBLY INSTRUCTIONS](#)

### BALLET BARRE - REF. 2220

- Ref. 2220: Wooden ballet barre: 1.60 m
- Ref. 2217: Double bracket barre support
- Ref. 2216: Single bracket barre support
- Ref. 2215: Barre support without brackets



Ref. 2220

### WALL BARS - REF. 2315-2325-2335-2345-2355-2365-2370



Ref. 2345

- Ref. 2315 to 2365: Wall bars with 1 to 6 sections.
- Ref. 2370: Detachable wall bar protection (attaches to wall bar refs. 2315 to 2365).